

Lift&Drive



Lift&Drive

130P

 PRONOMIC

Lift&Drive 130P

quick, strong and adaptable

Lift&Drive 130P is our selfmanufactured quick, strong and very flexible lift trolley.

With a lifting speed of 7,6 sec/1000 mm it is one of the fastest lift trolleys on the market.

The trolley is built in modules, which means that you build it fully adapted to your needs.

130P is able to handle loads up to 130 kg and at the same time do more lifts and do it quicker thanks to the new motor.

130P is equipped with central brake and directional lock on the rear wheels, making

them maneuverable, quick and easy to turn sideways.


The mast are equipped with a screw drive, which makes it reliable, durable and require minimal maintenance. The colum are available in different heights.

To ensure maximal safety the trolleys possess a built-in release function, which serves as protection from crushing injuries and prevents the trolley from tipping over.

Lift&Drive 130P is very simple to use and easy to handle, they require only very little maintenance.

Module-based design - your requirements and working environment determine the final tool

- 1 Pair of legs
- 2 Electronic unit
- 3 Control box
- 4 Column
- 5 Intermediate section
- 6 Handlebar
- 7 Charger

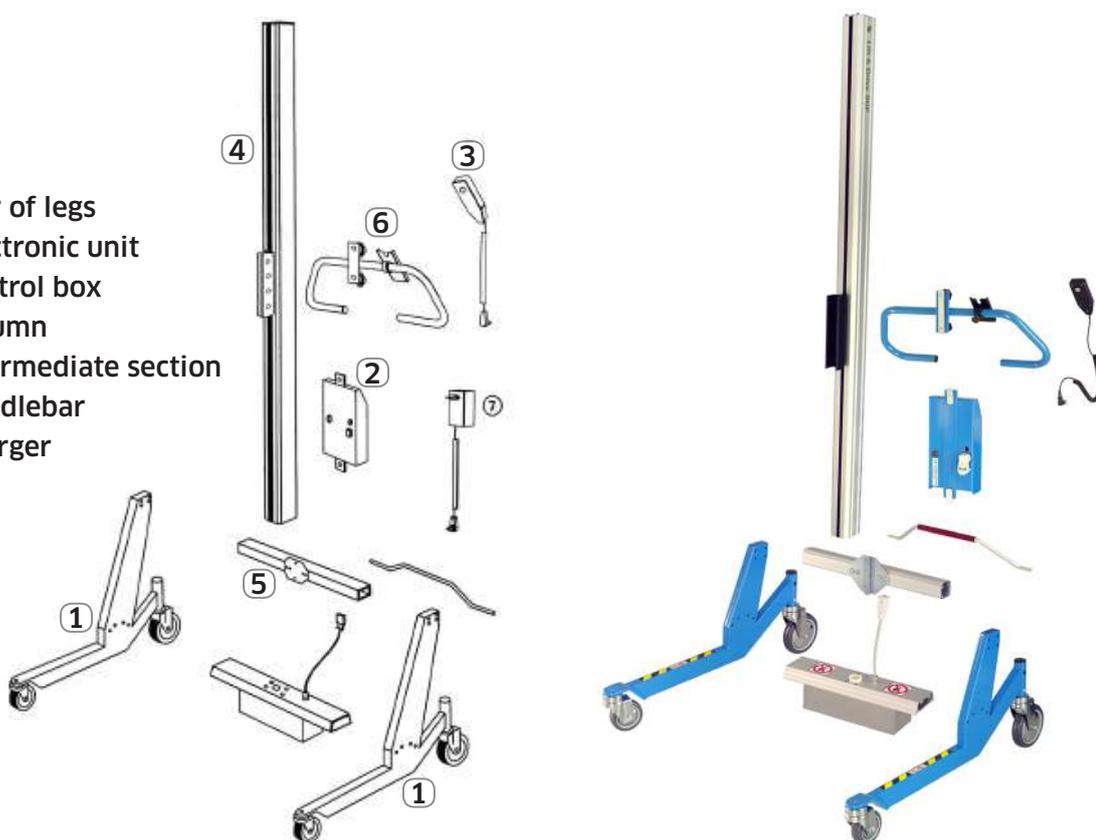

Accessories - standard or customized

We have a large number of standard tools such as load platform, forks, control and counting scale and Squeeze&Turn and our pneumatic expandable Expand& Turn. We also manufacture customized tools in accordance to your specifications.



Prong for roll handling



Fork



V-block



Roll platform, with side-feed



Squeeze&Turn



Scales



Expand&Turn -
Pneumatic expander,
turing operated electrically



Platform with edge rolls



Expand&Turn -
Pneumatic expander,
turing operated manually

Flexibility - choose mast height, and width & length of legs



Technical Specifications

Technical Specifications for Lift&Drive, 130P

	Overall height, standard	Overall height, low built	Total lifting height, standard	Total lifting height, low built	Length of stroke
Standard	<u>1732</u>	<u>1681</u>	<u>1234</u>	<u>1184</u>	<u>1160</u>
+250	1982	1931	1484	1434	1410
+500	2232	2181	1734	1684	1660
+700	2432	2381	1892	1884	1860
+1000	2732	2681	2234	2682	2160
Minimum lifting height			40 mm		
Overall width	733 mm to 1573 mm				
Length (without loading platform) standard, low-built	904, 881 mm				
Minimum width(outside)	490 mm				
Maximum width (outside)	1390 mm				
Wheel diameter (front/rear) standard, low-built	100/150, 60/100 mm				
Maximum load 130P	130 kg				
Dead weight	From 45 kg				
Battery voltage	24 V				
Battery capacity	12 Ah				
Charging voltage	230VAC/50Hz or 115VAC/60Hz				
Lifting height with max. load for 130P	10 sek/1000mm up. 7 sek /1000mm down				
Material	Chassis in powder-coated steel and in stainless steel				

Underlined values apply for standard trolley

For further info
please contact your
sales representative

PRONOMIC AB

info@pronomic.se
www.pronomic.se



 **PRONOMIC**